


1/4-14 410 Stainless Lap Panel to Panel Fastener

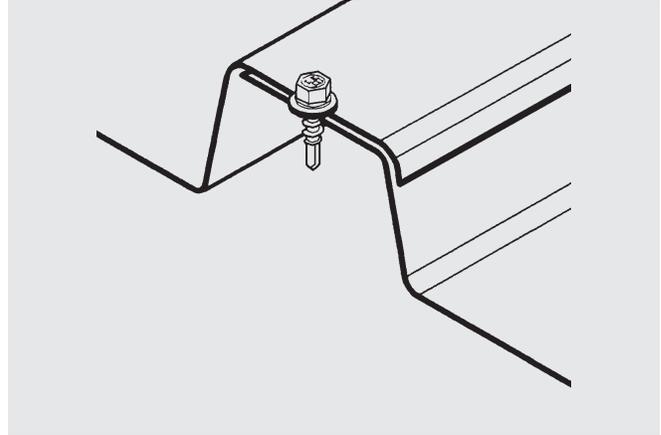

Features and Benefits

- 410SS provides resistance to corrosion in mild to light industrial environments
- High hex washer head provides driving stability
- Self-drill point for fast installation
- Available with no sealing washer or with aluminum bond seal washer

Application

Panel to panel side lap, end lap, and other stitch applications

Product Selection

Material No.	Fastener Length		Thread Length*	Load Bearing Length		Description	Carton Wt. (lbs.)	Carton Qty.
	(in)	(mm)		(in)	(mm)			
791283	7/8"	22	Full	0.31"	8	SDL-S4-#14x7/8-HW5/16-AB19/32	38	2,500

Plain product bagged 250 pieces, unless otherwise noted.

*Note – Thread length measured from tip of the drill point to top of the threads.

Installation and Application Considerations

Tools: 0–2000 rpm screw gun equipped with depth sensing nose piece.

Composite thickness should not exceed 0.095" (2.4 mm).

Use of impact guns or hammer drills is not recommended.