

The leading and proven method for timber-concrete composite floors


The production of timber-concrete composite systems can be done simple, safe and economically with the help of VB-mounting solutions by SFS.



The complex fastener geometry developed and manufactured for this application ensures proper function in this demanding application. Coupled with ergonomic installation tools, comfortable and precise angled installation is achieved, ensuring the proper composite action. Speed and reliability of the system VB make it the most cost effective way to achieve timber-concrete composite structures in new or existing construction.

Product Information

- Very high efficiency
- Highest security
- Maximum installation comfort
- For renovation and new build construction

Approvals

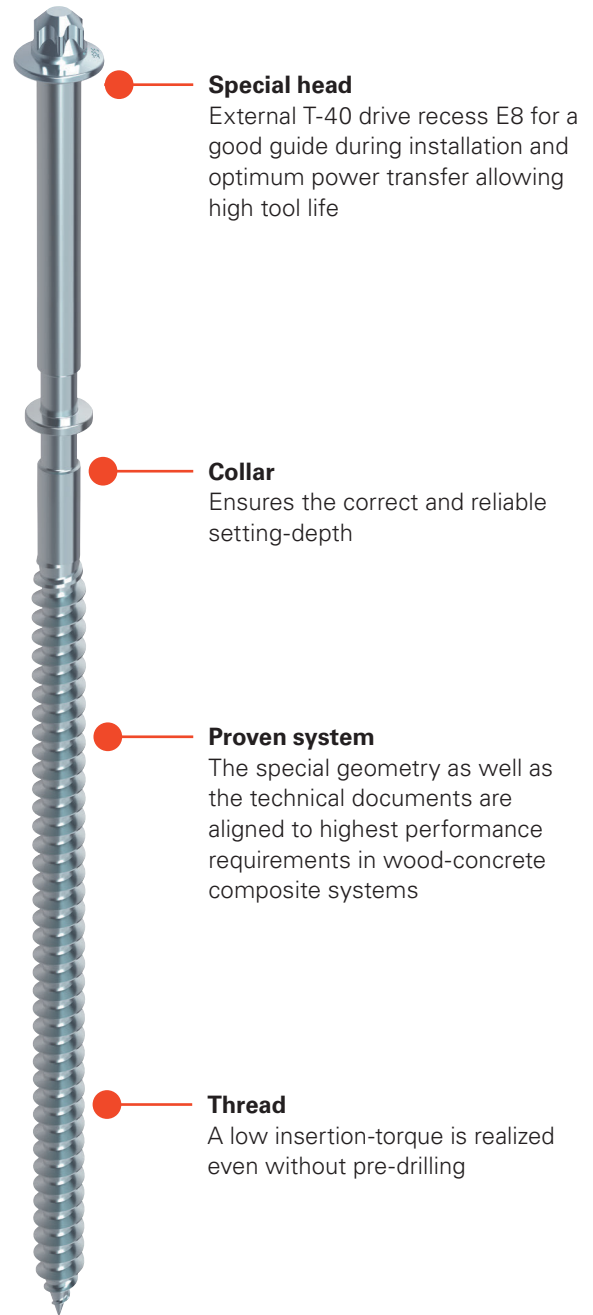

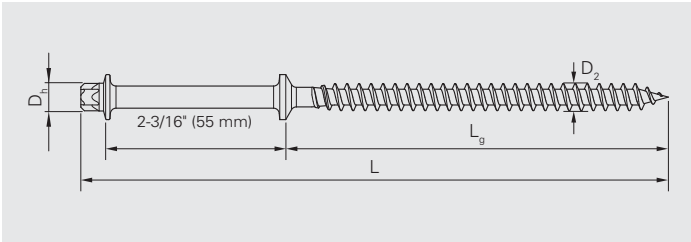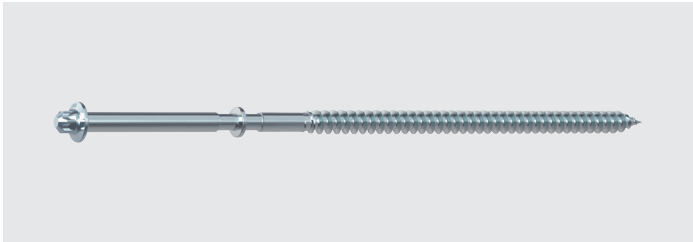

Features

- Special head
- T-drive
- Partial thread
- Bright zinc plated, A2K
- Timber-concrete composite

Approvals



Material

CHROME (VI) FREE +



5/16" (7.5 mm) Carbon steel timber fastener

Product code* Type	Diameter (D ₂)		Nominal length (L)		Thread length (L _g)		Head dia. (D _h)		Drive	Carton qty
	in	mm	in	mm	in	mm	in	mm		
VB-48-7.5×100	5/16"	7.5	6-1/8"	155	4"	100	1/2"	12.0	external T40	100
VB-48-7.5×165			8-5/8"	220	6-1/2"	165				

*Product code length designation reflects thread length (lg). Unthreaded upper length (lu) remains fixed at 55 mm for both nominal lengths 155 and 220.

Accessories

Using suitable installation tools is recommended



Product code	Description	Qty.	Material no.
CF-VB/L	Stand-up setting tool	1	1130228
V40-15VB	Insert bit	1	98173
ZA1/4"-CF-WS/M	Magnetic bit holder	1	1659455