

2" Butterfly Base & Tab Engineered Panel Clip



Features and Benefits

- Manufactured from high quality, corrosion resistant steel meeting strict mechanical property requirements
- Tightly controlled manufacturing tolerances for a secure and functional fit every time
- Allows limited thermal movement (determined by length of slide between the clip's top and base). Always follow the standing seam panel manufacturer's details and instructions on proper use, location and performance values of float clips as well as properly fixing of roof panels to the structure to prevent uncontrolled sliding

Application

Standing seam panel clips used for attachment of mechanically seamed panel types wherein movement of the roof panel system is required to allow for thermal expansion and contraction

Product Selection

Base

Material No.	Item	Description	Carton Wt. (lbs.)	Carton Qty.
1126600	2" Butterfly base	18 ga. (1.2 mm) G-90 Galvanized	38	150

Tab


Material No.	Item	Description	Carton Wt. (lbs.)	Carton Qty.
1216534	2" Butterfly tab	22 ga. (0.8 mm) G-90 Galvanized	7	150
1342536	2" Butterfly tab	22 ga. (0.8 mm) 304SS	6	150

2" Butterfly Base & Tab Engineered Panel Clip

Specifications Base


Height: 1.75" (44.45 mm)
Width: 4.50" (111.43 mm)

Holes: 2-hole

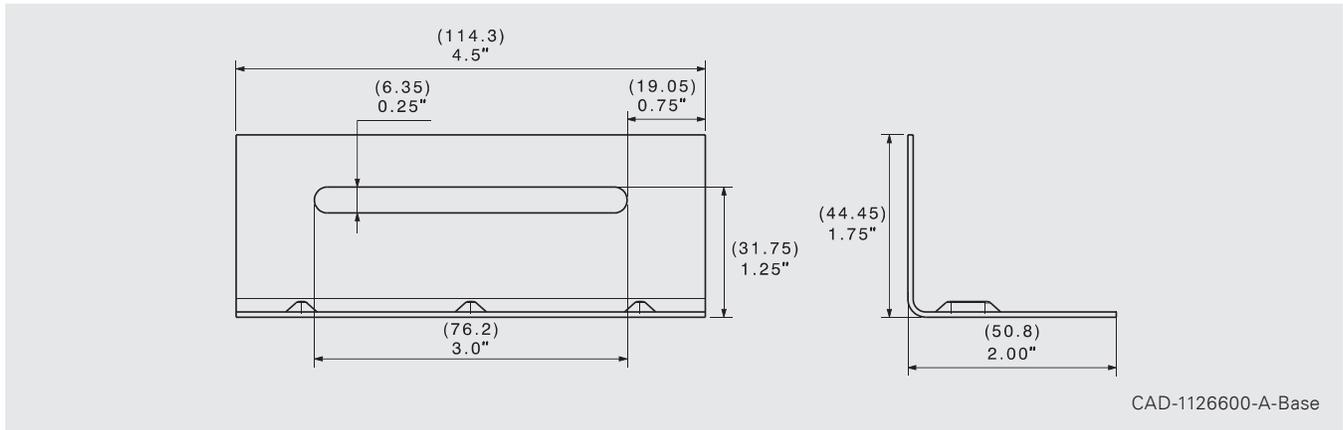

Specifications Tab

Height: 0.93" (21.59 mm)
Horizontal Leg: 0.718" (18.24 mm)

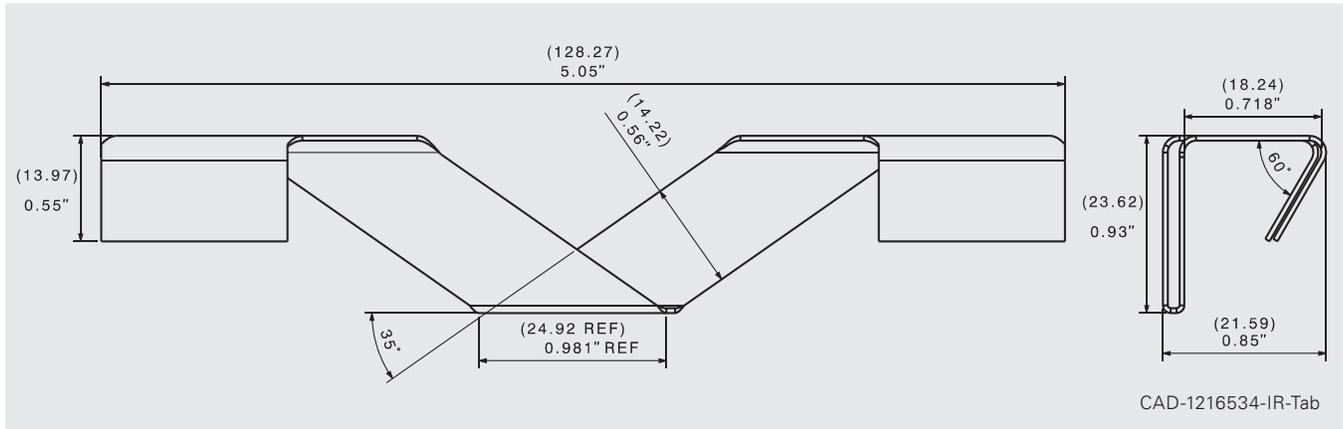

Installation and Application Considerations

- Compatible with:
 - Englert S2500
 - Ultra Seam US-200
 - Zimmerman SS2000
 - New Tech SS200
 - Roll Former Corp. 23C
 - Ultra Seam US-200C
- Refer to SFS standing seam fastener offering for panel clip attachment options
- Always consult with panel manufacturer or design engineer to ensure proper clip recommendations