


# #12-14 410 Stainless SD3 Metal to Metal Fastener

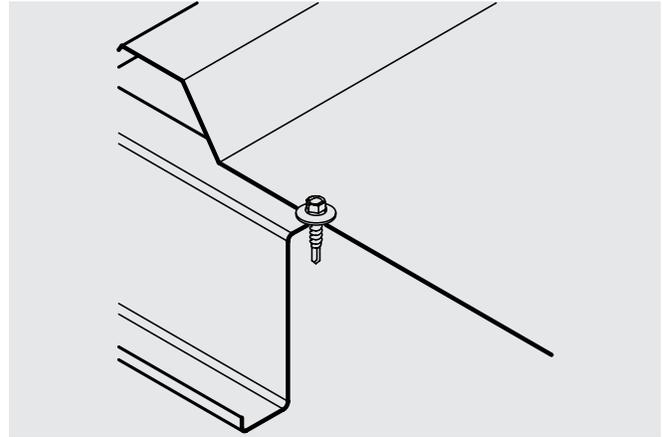

## Features and Benefits

- 410SS provides resistance to corrosion in mild to light industrial environments
- Precision cold forged point assuring superior strength and the fastest drilling time performance
- Designed to have low driving and thread engagement torque and provide maximum clamp load
- Available with no sealing washer or with aluminum bond seal washer

## Application

Metal panel to light and medium gauge metal application

## Product Selection

Material No.	Fastener Length		Thread Length*	Load Bearing Length		Description	Carton Wt. (lbs.)	Carton Qty.
	(in)	(mm)		(in)	(mm)			
791271	1"	25	Full	0.35"	9	SD3-S4-#12x1-HW5/16-AB19/32	31	2,500
791315	1-1/4"	32	Full	0.60"	15	SD3-S4-#12x1-1/4-HW5/16-AB19/32	38	2,500
791340	1-1/2"	38	Full	0.85"	22	SD3-S4-#12x1-1/2-HW5/16-AB19/32	34	2,500

Plain product bulk carton packed.

\*Note – Thread length measured from end of pilot length to end of the threads.

## Installation and Application Considerations

Tools: 0–2000 rpm screw gun equipped with depth sensing nose piece.

Fastener length should provide for a minimum of 3/16" penetration of fully developed threads into metal substrate.

**Use of impact guns or hammer drills is not recommended.**