



isoweld[®] Stress Plates for induction welding attachment



Application


TPO and PVC/KEE/TPA membrane attachment using isoweld[®] induction welding tools

Features and Benefits

- Proprietary adhesive for secure weld
- Stacked for ease of use
- 22 ga. G90 Galvanized steel

Product Selection

Material No.	Item	Description	Carton Wt. (lbs.)	Carton Qty.
1555270	isoweld [®] PVC plate	FI-P-6,8-PVC-PC	34	500
1555269	isoweld [®] TPO plate	FI-P-6,8-TPO-PC	34	500

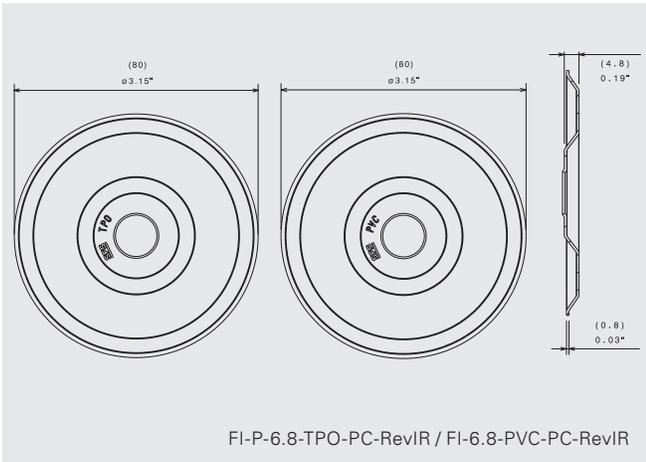

Specifications

OD: 3.15" (80 mm) Round
 Material: G90 Steel with proprietary adhesive coating
 Back of plate: Gray polyester coating
 Color (front of plate): TPO – Yellow
 PVC/KEE/TPA – Purple

Approvals



State of Florida: FL20311

16-0712.08

Installation and Application Considerations

Use with isoweld[®] induction welding tools and applications approved by the roofing system manufacturer. Use with:

- #15 Dekfast
- #12 Purlin
- TPR-L Peel Rivet

Contact SFS for special application use with #12 or #14 Dekfast

Metric values are approximate conversions.

The details stated are results of tests and/or calculations and therefore are non-binding and do not represent warranties or warranted characteristics for not specified applications. All calculations therefore have to be checked and approved by the responsible planner ahead of execution. The user is responsible to assure compliance with all applicable laws and regulations.

US
 T 800 234 4533
 www.sfsintecusa.com

Canada
 T 866 847 5400
 www.sfsintec.ca