


#10 Type A Pancake 304SS SSR Panel Clip to Wood Fastener

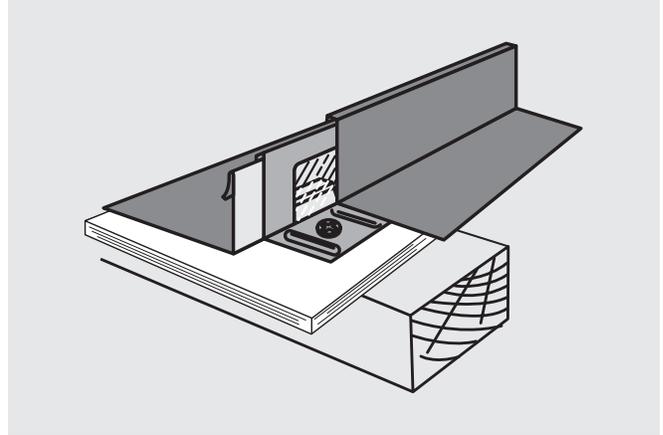

Features and Benefits

- 304SS for maximum corrosion resistance
- Pancake head low profile fits under most panel profiles
- Type A drill point for fast installation
- #2 square drive provides driving stability

Application

Standing seam panel clip attachment to wood substrate where corrosion resistance of 304SS is required due to atmosphere or wood treatments


Product Selection

Material No.	Fastener Length		Thread Length*	Description	Carton Wt. (lbs.)	Carton Qty.
	(in)	(mm)				
1545891	1"	25	Full	CSTA-S3-#10x1-PC-SQ2	40	5,000
1545895	2"	51	Full	CSTA-S3-#10x2-PC-SQ2	30	2,500

Plain product bagged 250 pieces, unless otherwise noted.

*Note – Thread length measured from tip of the drill point to end of the threads.

#10 Type A Pancake 304SS SSR Panel Clip to Wood Fastener

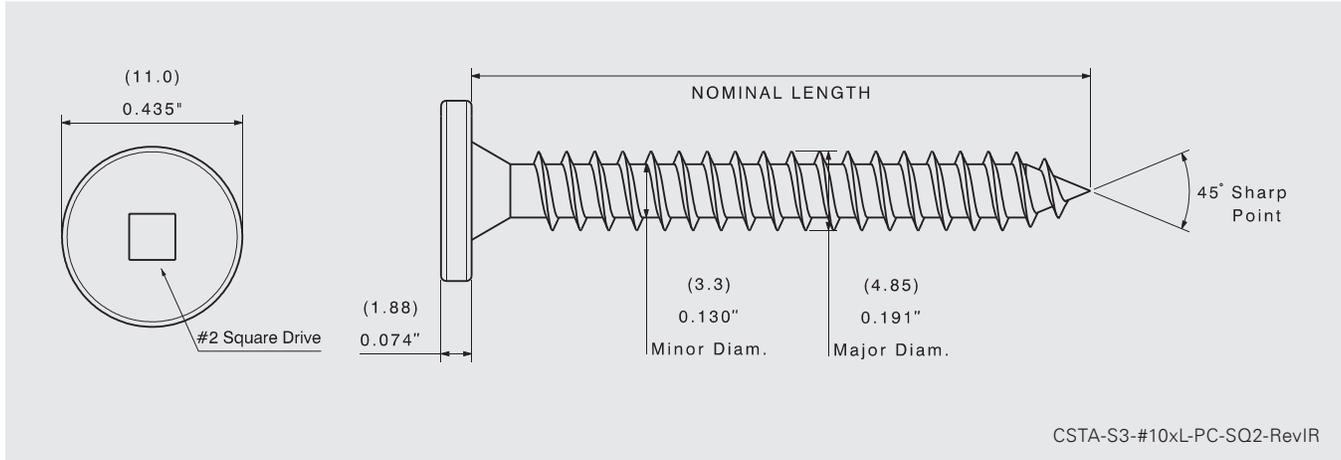

Product Specifications

Diameter: #10 (4.85 mm)
 Threads Per Inch: 12
 Head Style: Pancake
 Drive: #2 square

Drill Point: Type A
 Thread Major Dia: 0.191" (4.85 mm)
 Thread Minor Dia: 0.130" (3.3 mm)

Performance Data^{1,2}

Material Strength

Tensile	1460 lbf / 6497 N
Shear	1357 lbf / 6039 N
Torsional	45 lbf·in / 5.1 N·m

Pull Out Strength Wood: SPF

1" (25.4 mm) penetration	544 lbf / 2420 N
1-1/2" (38.1 mm) penetration	995 lbf / 4426 N

¹ Pull out strength values may vary from tested loads depending upon specific wood density variations.

² PLK 12703

Installation and Application Considerations

Tools: 0–2500 rpm screw gun equipped with depth sensing nose piece.

Use of impact guns or hammer drills is not recommended.

Special care needs to be taken when installing #10 Type A Pancake 304SS clip fasteners into wood substrate less than 1" in thickness. Stripping or partially stripping the fastener out during installation compromises the clamp load and can affect the performance of the fastener.