


2" Float Engineered Panel Clip

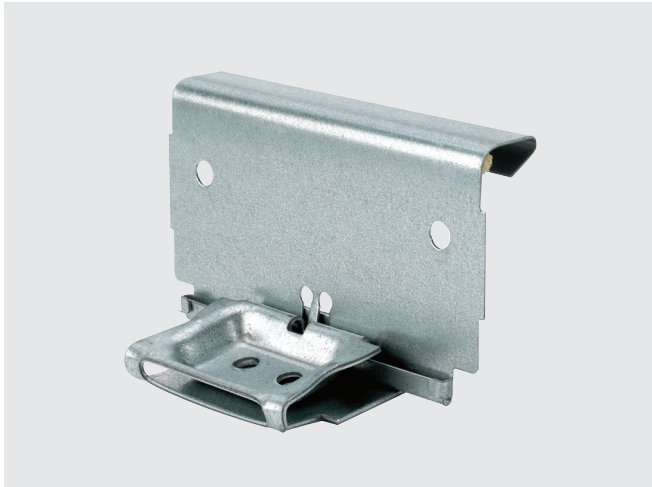

Application

Standing seam panel clips used for attachment of mechanically seamed panel types wherein movement of the roof panel system is required to allow for thermal expansion and contraction


Features and Benefits

- Manufactured from high quality, corrosion resistant steel meeting strict mechanical property requirements
- Tightly controlled manufacturing tolerances for a secure and functional fit every time
- Allows limited thermal movement (determined by length of slide between the clip's top and base). Always follow the standing seam panel manufacturer's details and instructions on proper use, location and performance values of float clips as well as properly fixing of roof panels to the structure to prevent uncontrolled sliding

Product Selection

Material No.	Item	Description		Carton Wt. (lbs.)	Carton Qty.
		Base Material	Tab Material		
1158556*	2" Float clip	16 ga. (1.5 mm) G-90 Galvanized	22 ga. (0.8 mm) G-90 Galvanized	37	100
1384108*	2" Float clip	16 ga. (1.5 mm) G-90 Galvanized	22 ga. (0.8 mm) 304SS	33	100
1314596*	2" Float clip	16 ga. (1.5 mm) 304SS	22 ga. (0.8 mm) 304SS	33	100
1331799*	2" Float clip	16 ga. (1.5 mm) 304SS	26 ga. (0.5 mm) 304SS	29	100

*Sealant applied.

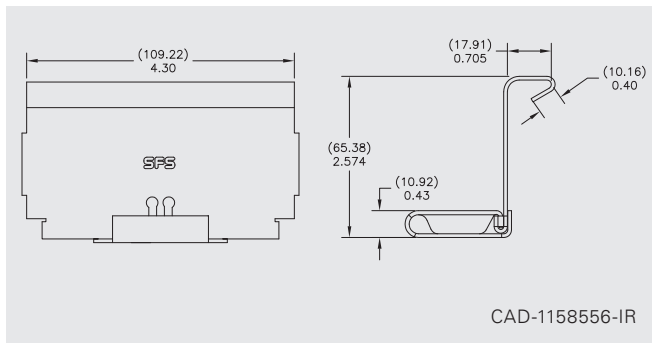

Specifications

Height:	2.574" (65.38 mm)
Width:	4.30" (109.22 mm)
Holes:	2-hole

Installation and Application Considerations

- Compatible with:
 - New Tech SS200
 - Roll Former Corp. 23C
 - Zimmerman SS2000
- Refer to SFS standing seam fastener offering for panel clip attachment options
- Always consult with panel manufacturer or design engineer to ensure proper clip recommendations