


HVP 88318

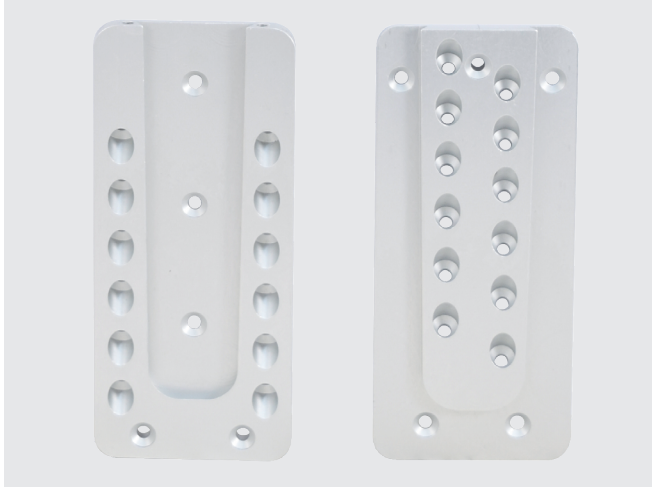

Application

Concealed beam connector for wood-wood connections.

Product Specifications

Dimensions w x h x d	80 x 180 x 12
Number of screws	34
Screw size	ø 5 x 60 – 100
Minimum timber section with screw ø 5 x 60 (mm) header	70 x 200
Joist	100 x 200
Characteristic load capacity* ø 5 x 60	47.55
ø 5 x 100	78.32
Carton quantity	10
CE	*

* F_{2,Rk} (kN) for GL24h with fully threaded screws: ø 5 x 60 with effective thread length of 54 mm and ø 5 x 100 with effective thread length of 94 mm. For other screws and thread lengths or wood based materials: cf. design manual.

Product Description

Main and secondary beam connection wood to wood

Main and secondary beam connection wood to wood with PITZL HVP 88318.1000 according to ETA-15/0187. The connection to secondary beam with 17 SFS HT (Heco) screws with a diameter of 5.0 mm and a length of 60/80/100 mm. Connection to main beam with 17 SFS HT (Heco) screws with a diameter of 5.0 mm and a length of 60/80/100 mm. A transverse tension lock is/is not to be provided in the area of the main/secondary beam. The main beam is/is not torsional fixed or sufficiently held. The serviceability has to be proven by the stiffness characteristics. A fire resistance time of 60 minutes is to be solved by appropriate design measures.

The characteristic load bearing capacity according to timber strength class C24 are:

F_{1,Rk} = 19.04 / 25.28 / 31.36 kN – Force acting in direction of the secondary beam

F_{2,Rk} = 44.06 / 58.51 / 72.57 kN – Force acting in direction of insertion

F_{3,Rk} = 0.00 kN – Force acting against direction of insertion

F_{4,Rk} = 25.28 kN – Force acting perpendicular to direction of insertion

M_{tor,J,Rk} = 700.33 kN – Rotation moment in the axis of the secondary beam

The characteristic load bearing capacity according to timber strength class GL24h are:

F_{1,Rk} = 20.55 / 27.29 / 33.84 kN – Force acting in direction of the secondary beam

F_{2,Rk} = 47.55 / 63.15 / 78.32 kN – Force acting in direction of insertion

F_{3,Rk} = 0.00 kN – Force acting against direction of insertion

F_{4,Rk} = 26.51 kN – Force acting perpendicular to direction of insertion

M_{tor,J,Rk} = 734.51 kN – Rotation moment in the axis of the secondary beam

The number and arrangement of the connectors as well as the installation and assembly must be taken from the specifications in accordance with ETA-15/0187. Basically, the requirements of DIN EN 1995 must be fulfilled.

HVP 88318

Static Values

Effective thread length (l_{ef})		Minimal section (mm)		Characteristic load capacity R_k (KN)							
				Solid wood C24 ($\rho_k = 350 \text{ kg/m}^3$)				Glued-laminated timber GL24h ($\rho_k = 385 \text{ kg/m}^3$)			
Screws	l_{ef} (mm)	H	J	$F_{2,RK}$	$F_{3,RK}$	$F_{4,RK}$	$F_{1,RK}$	$F_{2,RK}$	$F_{3,RK}$	$F_{4,RK}$	$F_{1,RK}$
$\varnothing 5 \times 60$	54	70 x 200	100 x 200	44.06	0.00	25.28	19.04	47.06	0.00	26.34	20.34
$\varnothing 5 \times 80$	74	90 x 230	100 x 230	58.51			25.28	62.49			27.00
$\varnothing 5 \times 100$	94	110 x 260	100 x 260	72.57			31.36	77.50			33.49

(Erstellt) Autret	(Datum) 24.03.2015	(Werkstoff) EN AW 6082	nach	(Maßstab)
A FREIGABE	24.03.2015	(Beschichtung)		
Ind. Änderung (Benennung)	Datum	Name	(Zeichnungsnummer / Artikel-Nr.) 88318.0000 Teil 1	
HVP			Blatt /	

Pitzl Metallbau GmbH & Co. KG
 Siemensstraße 26
 D-84051 Altheim
 Tel.: +49 (0) 87 03 / 93 46-0
 Fax.: +49 (0) 87 03 / 93 46-55

(Erstellt) Autret	(Datum) 19.03.2015	(Werkstoff) EN AW 6082	nach	(Maßstab)
A FREIGABE	19.03.2015	(Beschichtung)		
Ind. Änderung (Benennung)	Datum	Name	(Zeichnungsnummer / Artikel-Nr.) 88318.0000 Teil 2	
HVP			Blatt /	

Pitzl Metallbau GmbH & Co. KG
 Siemensstraße 26
 D-84051 Altheim
 Tel.: +49 (0) 87 03 / 93 46-0
 Fax.: +49 (0) 87 03 / 93 46-55