

# 2" Float Engineered Panel Clip



## Application

Standing seam panel clips used for attachment of mechanically seamed panel types wherein movement of the roof panel system is required to allow for thermal expansion and contraction


## Features and Benefits

- Manufactured from high quality, corrosion resistant steel meeting strict mechanical property requirements
- Tightly controlled manufacturing tolerances for a secure and functional fit every time
- Allows limited thermal movement (determined by length of slide between the clip's top and base). Always follow the standing seam panel manufacturer's details and instructions on proper use, location and performance values of float clips as well as properly fixing of roof panels to the structure to prevent uncontrolled sliding

## Product Selection

Material No.	Item	Description		Carton Wt. (lbs.)	Carton Qty.
		Base Material	Tab Material		
753279*	2" Float clip	16 ga. (1.5 mm) G-90 Galvanized	22 ga. (0.8 mm) G-90 Galvanized	29	100
1311597*	2" Float clip	16 ga. (1.5 mm) G-90 Galvanized	22 ga. (0.8 mm) 304SS	29	100
1395587*	2" Float clip	16 ga. (1.5 mm) 316SS	22 ga. (0.8 mm) 316SS	29	100

\*Sealant applied.

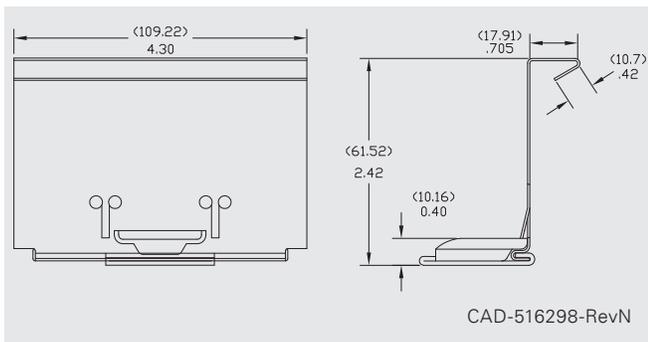

## Specifications

Height: 2.42" (61.52 mm)  
 Width: 4.30" (109.22 mm)  
 Holes: 2-hole

## Installation and Application Considerations

- Compatible with:
  - Englert S2500
  - New Tech SS210
  - Ultra Seam US-200
  - Zimmerman SS2000
  - New Tech SS200
  - Roll Former Corp. 23C
  - Ultra Seam US-200C
- Refer to SFS standing seam fastener offering for panel clip attachment options
- Always consult with panel manufacturer or design engineer to ensure proper clip recommendations